

# Removing/Replacing the PC in a Tower Enclosure



**⚠ DANGER**

**Hazardous voltage.**

**Contact may cause electric shock or burn.**


**Turn off and lock-out system power before servicing.**

Step 1) Shut down the RazorGage and the PC and un-plug the power to the enclosure.

Step 2) Remove the two pins that lock the tower enclosure door and open the door. The PC is located near the bottom of the enclosure.


**READ THESE INSTRUCTIONS BEFORE UN-PUGGING THE CABLES FROM THE MOTHERBOARD.**

All the PC components are mounted to this plate. This plate along with all the attached components is what will be removed and returned.

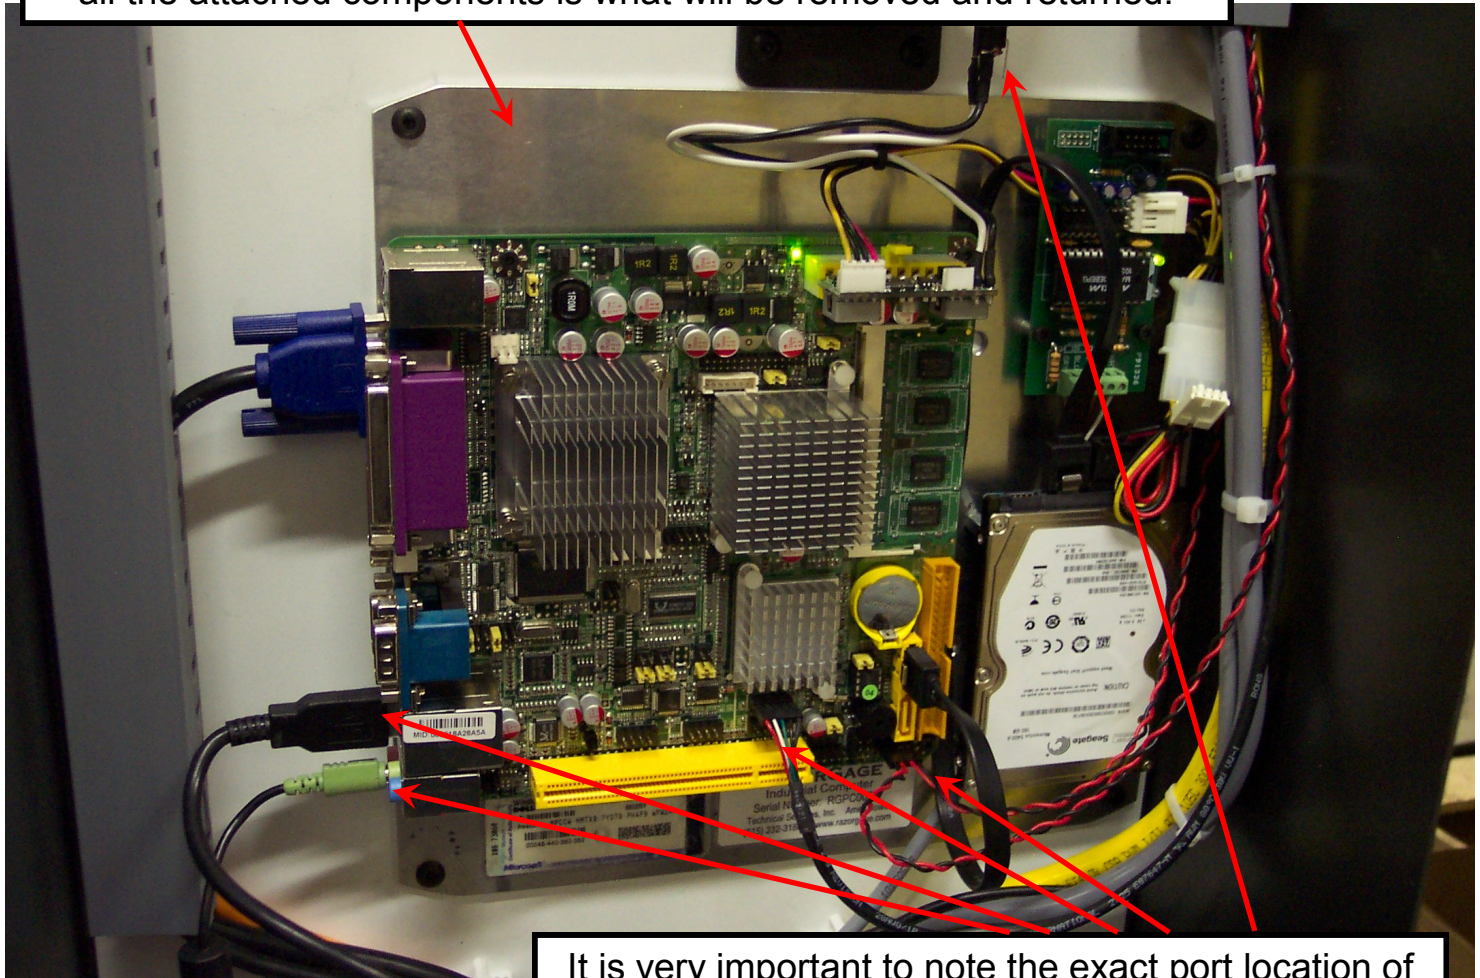

It is very important to note the exact port location of every cable that is unplugged from the motherboard so that everything works perfectly when you re-install. The next page shows important detail.



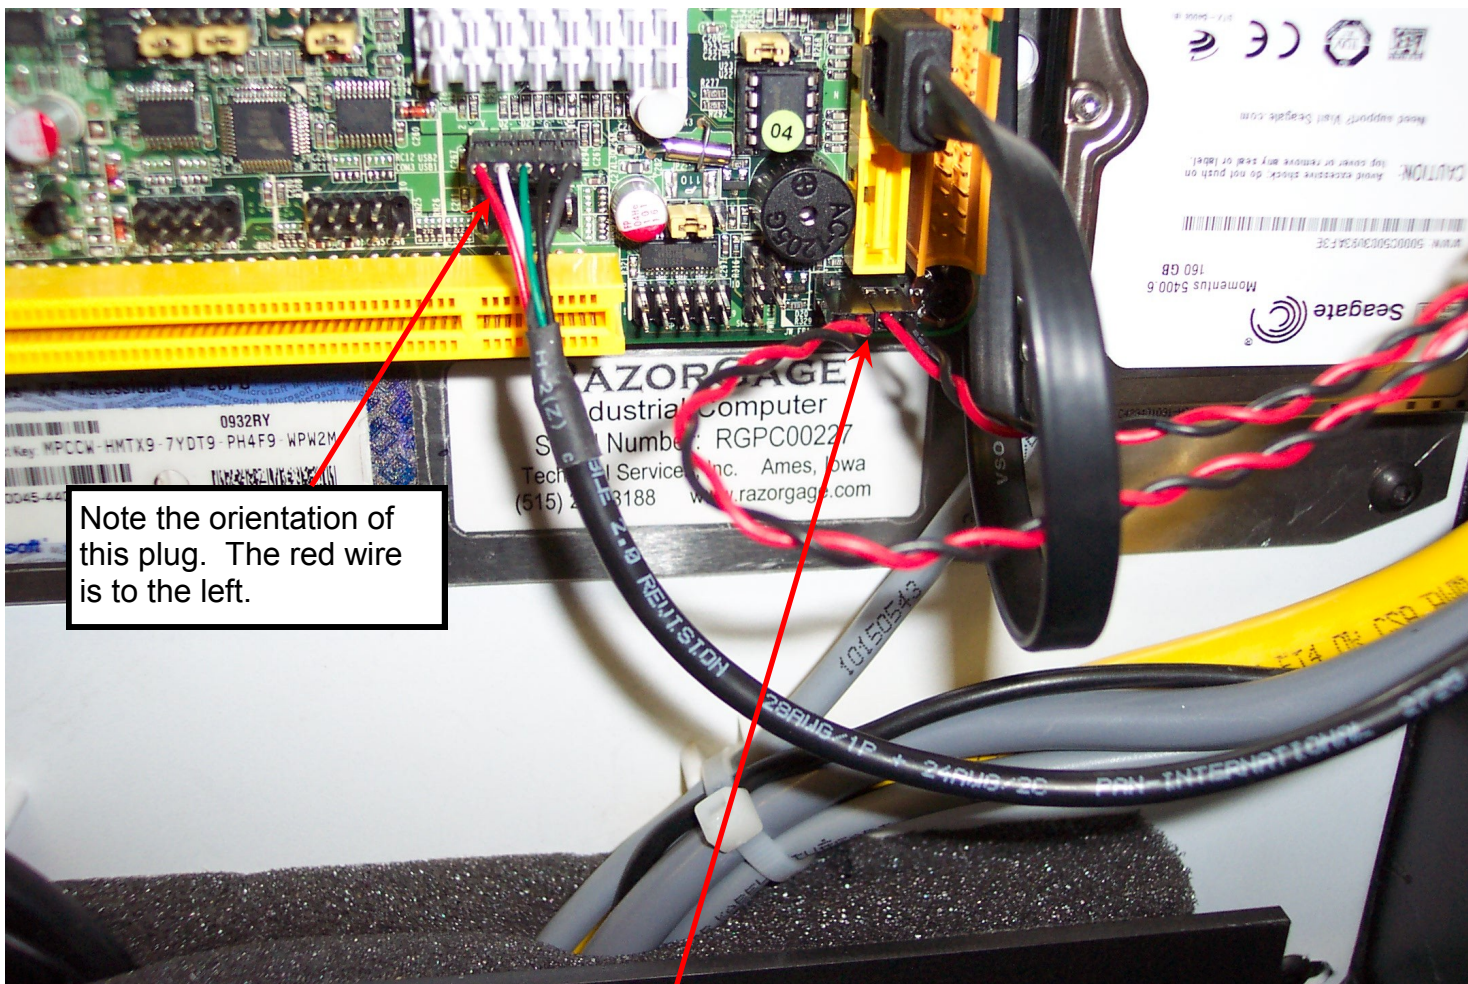

Note the orientation of this plug. The red wire is to the left.

These two connectors look exactly alike and can be put in upside down as well. If you place masking tape on the top surface before removing them from the motherboard and label them L & R for left and right before you unplug them it will save you a great deal of trial and error upon re-installation.

After marking all the cables, remove the plate with all the PC components attached by removing the four button head cap screws located in each corner of the plate. When choosing a box in which to ship the PC select one that allows at least 2 inches of space for packing materials to cushion the unit during shipment. Please fill out and return this form with the parcel:

Company Name \_\_\_\_\_

Company Ship To Address \_\_\_\_\_

Company Ship To City, State, Zip \_\_\_\_\_

Company Bill To Address \_\_\_\_\_

Company Bill To City, State, Zip \_\_\_\_\_

Contact Name \_\_\_\_\_

Contact Phone \_\_\_\_\_

Contact Email \_\_\_\_\_

Description of problem: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_