




# RAZORGAGE

POSITIONERS • SOFTWARE • SYSTEMS

## Dimensions for RazorGage Products




RazorOptimal Pockethole

- ◆ 208 or 230 3Ph x 30 Amps OR 450 3Ph 20 Amps  
3 Phase Voltage MUST be specified with order.
- ◆ 120 VAC x 15 Amps - 1 Duplex Outlet
- ◆ Compressed Air 80 psi @ 5 CFM
- ◆ 4" Dust Collection Port—600 CFM

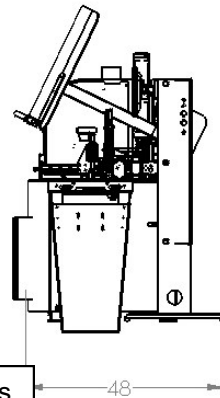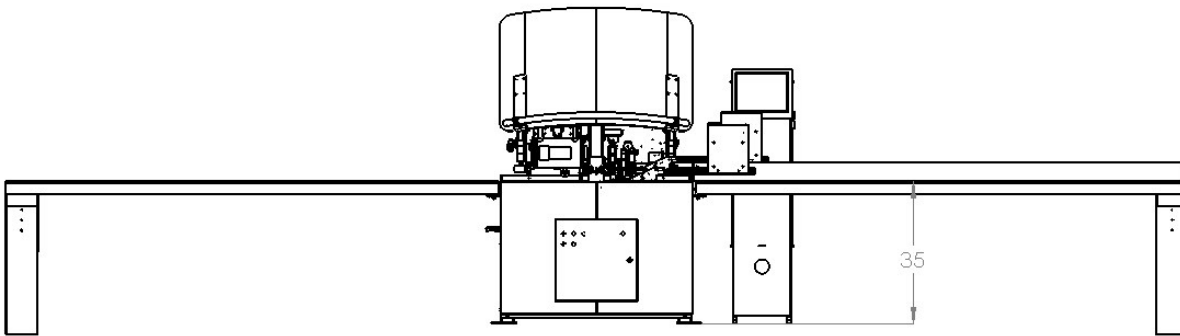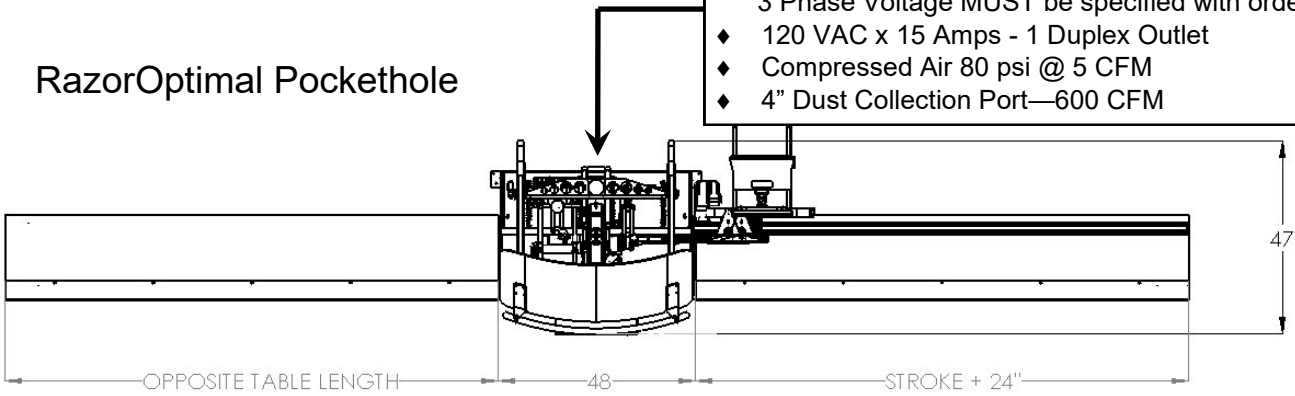

RazorOptimal Cyclone 600

- ◆ 208 or 230 3Ph x 30 Amps OR 450 3Ph 20 Amps  
3 Phase Voltage MUST be specified with order.
- ◆ 120 VAC x 15 Amps - 1 Duplex Outlet
- ◆ Compressed Air 80 psi @ 5 CFM
- ◆ 2 x 4" Dust Collection Port—600 CFM

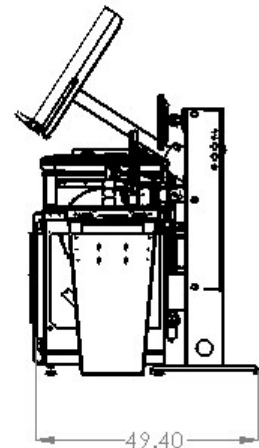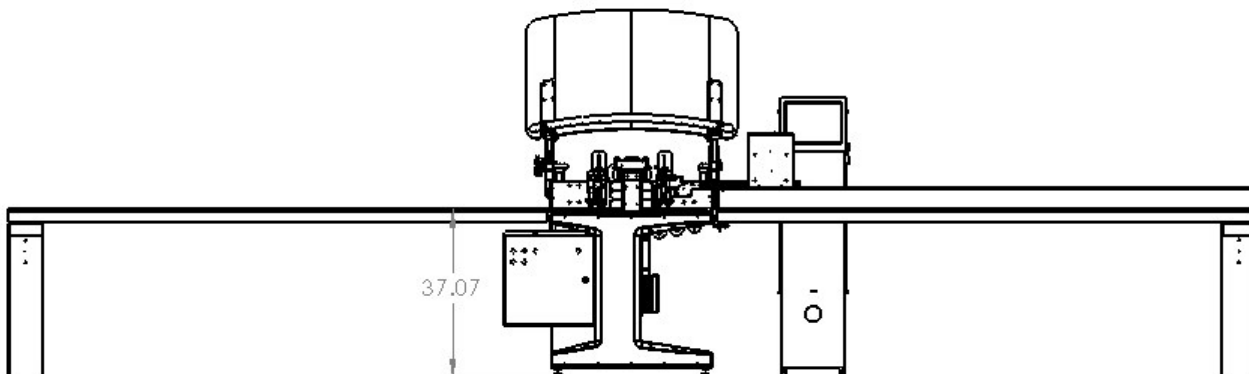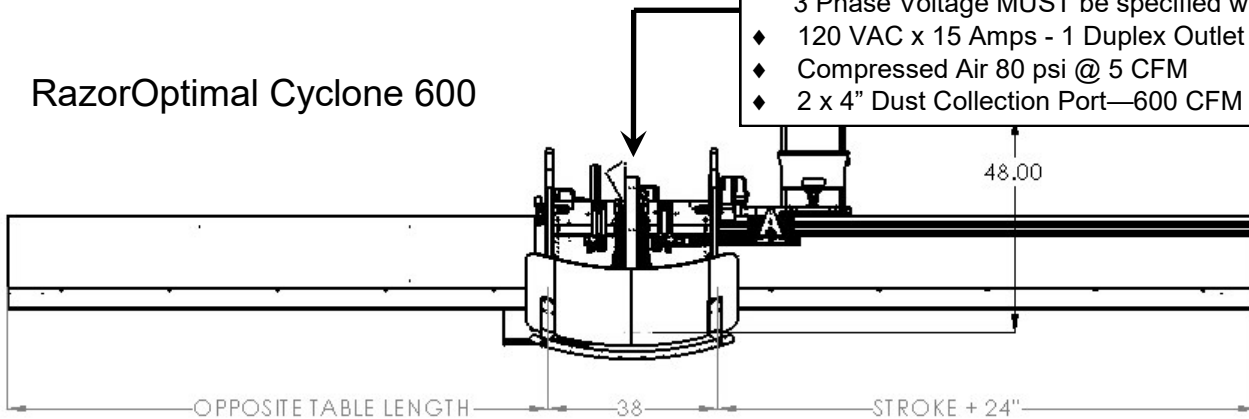

# RazorGage ST with Roller Table

