

RAZORGAGE

SAFE-T-CROWDERS

***INSTALLS EASILY
ON YOUR
UPCUT SAW!***



BETTER BY DESIGN

Sliding grips on either side of your saw's top guard allow your operator to safely and comfortably crowd stock against the fence & then cycle the saw by simultaneously depressing two Thumb buttons.

Foot pedal operated upcut saws are unsafe! Comply with current safety standards using Safe-T-Crowders.




WWW.RAZORGAGE.COM

515-232-3188 | Sales@RazorGage.com

RAZORGAGE

Installation

Whether your [upcut saw](#) has a foot pedal or a conventional pneumatic 2-hand anti-tie down device, installation of [Safe-T-Crowders](#) is simple. Either device mentioned will have a supply line and a signal line. The supply line provides line air pressure to pressurize the device. The signal line transports the air signal pressure to initialize the saw cycle logic circuit. To install Safe-T-Crowders simply remove the pressure line from the foot pedal and plug it into the pressure port on the Safe-T-Crowder. Now remove the signal line from your foot pedal and plug it into the signal port on the Safe-T-Crowder. Safe-T-Crowders require 35-120 psi to operate.

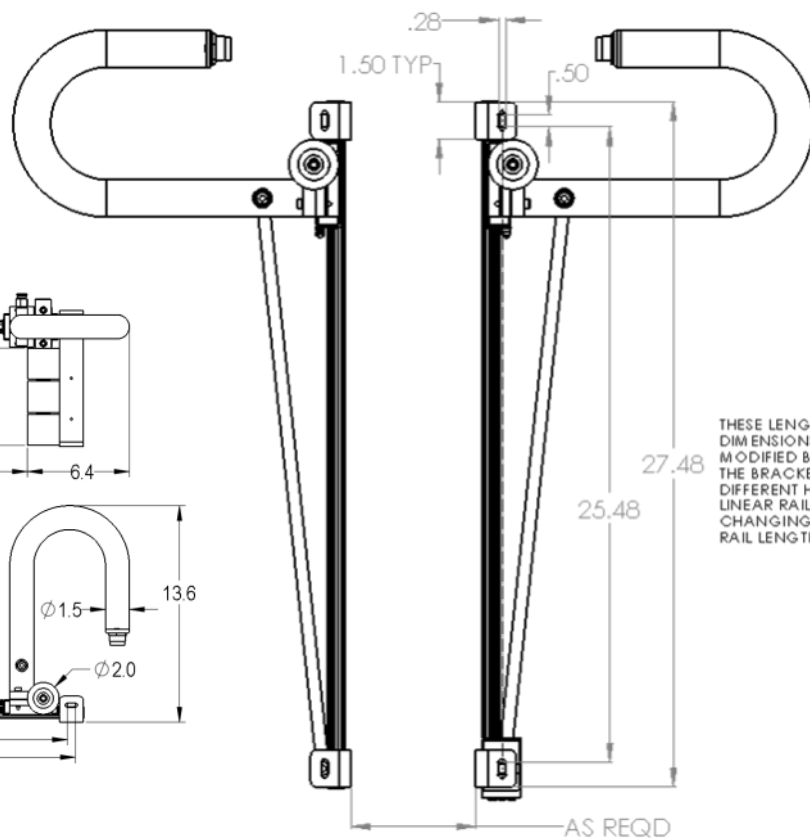

THESE LENGTH DIMENSIONS ARE EASILY MODIFIED BY ATTACHING THE BRACKETS TO DIFFERENT HOLES IN THE LINEAR RAIL OR BY CHANGING THE LINEAR RAIL LENGTH.