
## RAZORGAGE APS AUTO PUSHER SAW SYSTEM



# BETTER BY DESIGN

Our optimizing saw systems are built to provide durable, easy-to-operate cutting systems that are powerful, safe and can improve operating efficiencies while reducing waste.

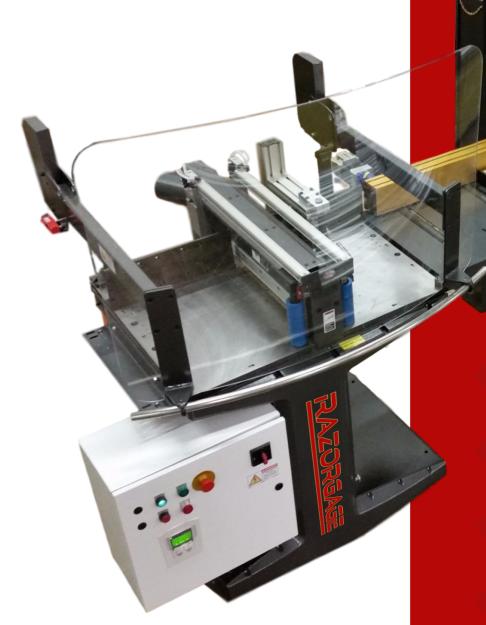

The APS Automatic Optimizing Upcut Saw System is built around the powerful and highly accurate RazorGage RG3 Automatic Saw Measuring System & the durable, clean-cutting Cyclone 600 Upcut Saw.

The APS optimizes your cuts but the main feature is the Automatic Pusher System which allows you to push "Go" and stand back. The automatic saw does the work and allows one person to both feed the saw and stack the finished parts, with no interruption.

The Intelligent Clamping System (ICS) eliminates the dangerous condition caused by half clamping the

leading or trailing edge of your material, which leads to scrapped parts. The ICS assures that material is held securely both horizontally and vertically. The accuracy and efficiency of the cutting process eliminates mistakes which further optimizes the production flow to minimize the time required to complete the job.

Great for cutting Wood, Fiberglass, Aluminum or nearly any non-ferrous metal. Aluminum cutting option includes an aluminum cutting blade and an air-powered, dual-tipped, spray mist lubrication system.

#### FEATURES

- ◆ Download cutlists directly to the RazorGage PC via Ethernet, USB drive or Wifi
- Optimize at the machine or run pre-optimized lists from your design software
- Sort cutlists into almost unlimited groups of like material, color, job & more, right at the machine
- ◆ Part length accuracy varies with application but +/-.005" is possible
- Push 200 lb at 40" per second
- Print paper labels or inkjet print directly on the parts
- Table surface options include solid PVC, PVC rollers or steel rollers
- Windows Tower PC operation on a large, color touch-screen monitor
- Optional articulated pusher mounted gripper

## **APS AUTO PUSHER**

### Better Software

The <u>automated saw software</u> on this optimizing industrial upcut saw system gives you the ability to download your cutlists and use multiple criteria to sort lists into hundreds of groups. Our RazorGage

Pusher Mode - Repeating Pattern

LIST REPEATING PATTERN

Test screen shoturg

Close The Filet (rmp)


Stock Length: 80 Load Position: 85 Lead Trim: 1 Saw Kerf: 02 Home Offset: 1


INDEX # (LENGTH | 1 | 20 | 2 | 24 | 3 | 12 | 4 | 12

READY FOR LOAD

LOAD

software is flexible, allowing you to import pre-made lists or edit and create cutlists right at the saw. Our software solutions are designed to be intuitive and able to adapt to all types of projects and applications.

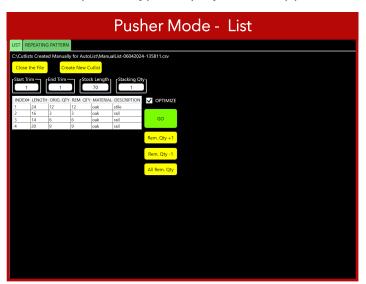


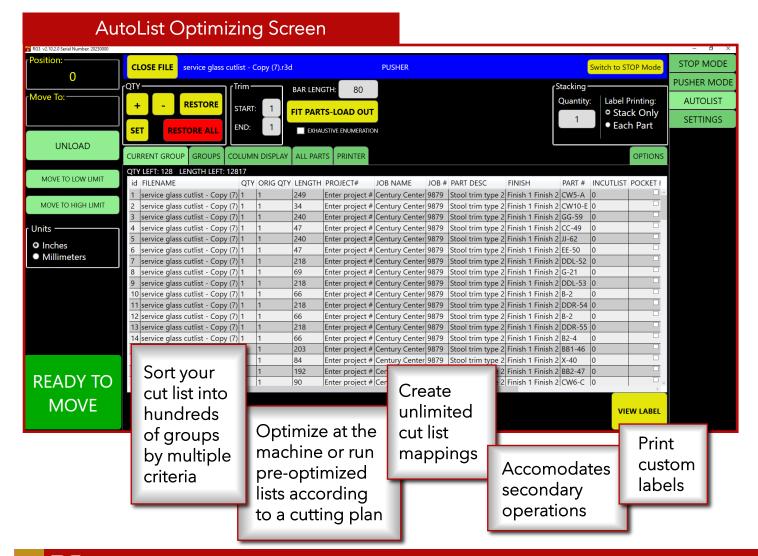

## APS AUTO PUSHER Specifications

APS Auto	matic Pusher Saw System Specifications				
Power	Positioner - 120 VAC, 10Amp				
	Saw (7.5hp) - 208-230VAC, 3-phase, 30 Amp -or- 460VAC, 3-phase, 20Amp				
Requirements					
Dust Collection	Two 4" diameter (102mm) requiring 600 cfm				
	(17m³) minimum for dry light materials. Other				
	material may need higher velocity/pressure.				
Compressed Air	Requires 80 psi (5.5 bar) at 5 cfm (0.14m³) air				
	filtered to 2.5 microns (oil and moisture free).				
	Use industrial air dryer, rated for cfm (CM) flow.				
	No lubrication required for air components.				
	Air must be lubricant free.				
Motor RPM	Variable from 2200 to 3450				
20" Blade for	ATB, Carbide Tip, 120T x 1" Bore				
Wood	ATB, Carbide Tip, 1201 x 1 Bore				
24" Blade for	ATB, Carbide Tip, 144T x 1" Bore				
Wood	ATD, Carbide Tip, 1441 X 1 Bore				
20" Blade for	TCG, Carbide Tip, 140T x 1" Bore				
Aluminum					
24" Blade for	TCG, Carbide Tip, 200T x 1" Bore				
Aluminum					
Push Force	200 lbs at 40 inches per second				
Maximum Push	50 inches per second				
Speed					
Material Length	Up to 60 feet				
Capacity					

Material	Cyclone 600 Width Capacity for Common Blade Diameters							
Thickness	14" Blade	16" Blade	18" Blade	500mm Blade	22" Blade	24" Blade		
0.5	6.97	10.38	13.23	15.42	18.27	20.62		
0.75	6.04	9.77	12.76	15.02	17.93	20.32		
1	4.89	9.10	12.25	14.59	17.57	20.00		
1.25	3.32	8.35	11.70	14.13	17.19	19.67		
1.5		7.49	11.10	13.64	16.79	19.32		
1.75		6.49	10.44	13.11	16.36	18.95		
2		5.25	9.72	12.54	15.90	18.55		
2.25		3.56	8.91	11.92	15.42	18.14		
2.5			7.98	11.24	14.90	17.70		
2.75			6.90	10.50	14.35	17.24		
3			5.58	9.68	13.75	16.74		
3.25			3.78	8.75	13.11	16.22		
3.5				7.68	12.42	15.67		
3.75				6.40	11.67	15.08		
4				4.75	10.84	14.45		
4.25				1.99	9.92	13.77		
4.5					8.88	13.03		
4.75					7.68	12.24		
5					6.20	11.37		
5.25					4.20	10.40		
5.5						9.30		
5.75						8.03		
6						6.49		

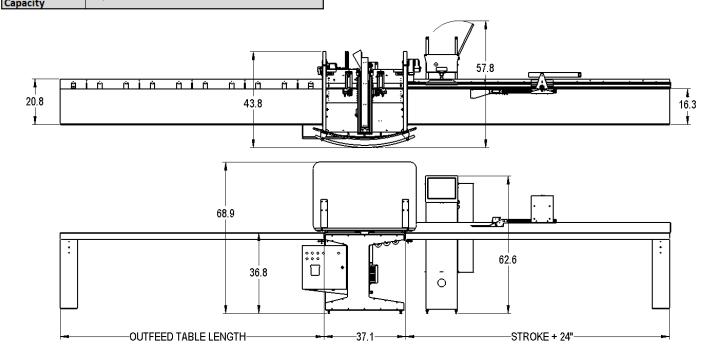

#### System Options & Accessories

- Ink Jet Printer
- Basic or Gang Stop Extension
- Standard or Heavy Duty Gripper
- Rolling Pin Canted Roller
- Tables Heavy Gauge, Powder Coated Steel

  - Height adjusts from 34.5" to 44.5" Surfaces 1/4" Solid PVC, PVC Rollers, Steel Rollers