

RAZORGAGE RG3

*With Yaskawa
Servo Drive*



Heavy gauge
steel tables
sold separately

BETTER BY DESIGN

Programmable
saw stops and
pusher systems that
have set a new
standard for accuracy,
repeatability and
Dependability.

RazorGage has
has the best
hardware, software
and motion control
system. RG3 includes
a Yaskawa Servo for
maximum reliability.

**5 Year Belt
Warranty**



WWW.RAZORGAGE.COM

515-232-3188 | Sales@RazorGage.com

RAZORGAGE

RAZORGAGE RG3

Automatic Saw Measuring System



The RazorGage [RG3 Automatic Saw Measuring System](#) is at the heart of our product line. Whether you use the RG3 as an automatic pusher or a measuring stop, this digital measuring fence can be used with a chop saw, upcut saw, downcut saw, drill press, haunching, notching and punching machines.

When looking to improve the output and efficiency for your operations, the RazorGage RG3 offers the highest degree of accuracy, repeatability and long-lasting dependability.

This system features a hi-performance motion controller that reacts quickly to jams, eliminating stretched belts.

The carriage assembly features a Hiwin hardened & ground, linear bearing rail with 2 recirculating ball bearing blocks just like you see on CNC machining centers for near friction-free motion, maximum rigidity, accuracy and long life.

FEATURES

- ◆ Windows PC w/ hi-resolution touch screen
- ◆ Networks easily using ethernet or WiFi and has tons of features
- ◆ Store 1000's of cutlists
- ◆ Optional optimizing software reduces waste material. Sorts cutlists into 1000's of groups according to multiple criteria, and much more
- ◆ Fraction Keys adjust position in just a few key strokes
- ◆ Uses the same linear bearings found on CNC machining centers
- ◆ Near zero backlash planetary gearhead & drive pulley
- ◆ 5 Year Belt Warranty
- ◆ Available in stroke lengths up to 60'



PC, Software, & Controls

TOWER PC

Windows operating system with a hi-resolution touch screen monitor. Cables pass through foam compression opening to prevent dust and chip penetration. Multiple USB & Ethernet port, Bluetooth, & Wi-Fi.

RG3 SOFTWARE

The [RG3 software](#) retains all the same features as the RGST software but with an even simpler interface. Setup and calibration functions are intuitive. The new UPDATE button allows you to update to the latest version instantly.

YASKAWA SERVO DRIVE

RazorGage is driven by a Yaskawa servo. Yaskawa is the only industrial drives and motion control manufacturer to win the Deming Medal, the most prestigious quality award in manufacturing.



RAZORGAGE RG3

Better Hardware

OUR PREMISE

An automatic saw measuring system only benefits your business if you can trust it to position accurately every day.

MECHANICAL FACT



Since most automatic saw measuring systems calculate stop position based on motor rotation, drive component precision is crucial to long term accuracy.

OUR CONCLUSION

- The conclusion is simple - the quality of the drive components directly affects return on investment.

RazorGage continually exceeds expectations due to the design and quality of our components.

Compare RazorGage to other Positioners

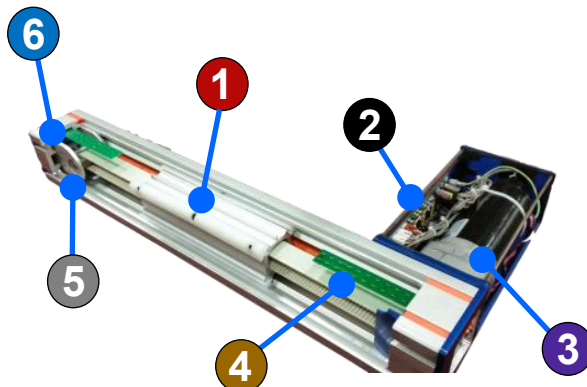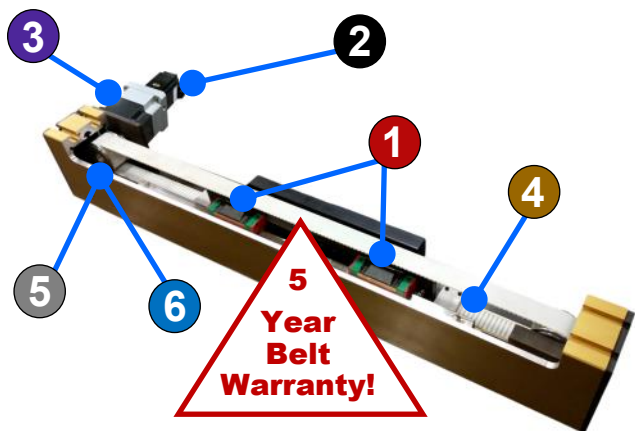

1	The RazorGage positioning carriage mounts on two re-circulating ball bearing blocks sliding on a hardened & ground steel rail. Just like you see on CNC machining centers!			Competitor uses plastic strips sliding on aluminum as the positioning carriage bearing.
2	RazorGage electronics are sealed inside IP54 rated housing impervious to chips.			Electronics sensitive to chips are inadequately protected.
3	RazorGage utilizes a planetary gearhead with 3 load paths transmitting torque & less than 7 arc minutes of backlash to maximize accuracy.			Spur gear style reducer others use, with 1.2 gear teeth transmitting load, is prone to excessive backlash.
4	RazorGage uses no sensors for homing or end of travel eliminating the need for failure prone components and wiring.			Contamination sensitive sensors inside the beam require long cable runs around sharp corners.
5	30 tooth drive pulley used on RazorGages has a larger bend radius increases belt life and twice the teeth to resist tooth shear.			15 tooth pulley competitor uses, has a tighter bend radius reducing belt life and half the teeth to resist tooth shear.
6	The RazorGage drive pulley is machined to match the belt tooth profile eliminating backlash.	 Zero Clearance	 1/64" Clearance	Standard pulleys have 1/64" clearance allowing backlash which reduces accuracy.



RAZORGAGE RG3

Better Software

The WINDOWS application software provides a bright, bold user interface. No menus to memorize. Operation is obvious. Setup and calibration functions are just a screen touch away.

Built-in functions such as fraction keys, pages of Presets, Cutlist screens in both pusher and stop mode, help eliminate operator mistakes and improve productivity.

- ◆ Our **PRESETS Screen** features hot keys to which you can assign positions and labels.
- ◆ Assign **infinite offsets** to picture buttons for secondary operations.
- ◆ Password protected **SETTINGS** has parameters with plain labels like SPEED, ACCEL, & SAW KERF make setup obvious. Our calibration utility tells you step by step how to calibrate.
- ◆ **Fraction Keys** minimize keystrokes reducing human error. Only 3 strokes to move to a position like 39 - 15/32.
- ◆ Select Stop Mode or Pusher Mode. Then select the type of operation based on your cutlist requirements. Screens are simple to use.

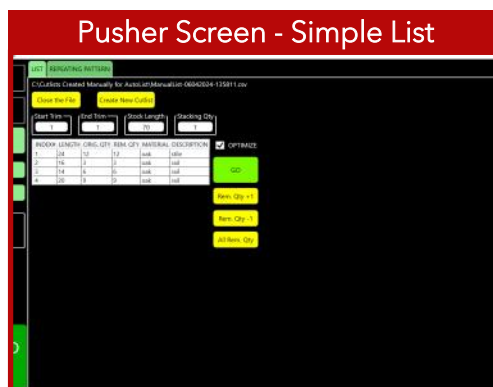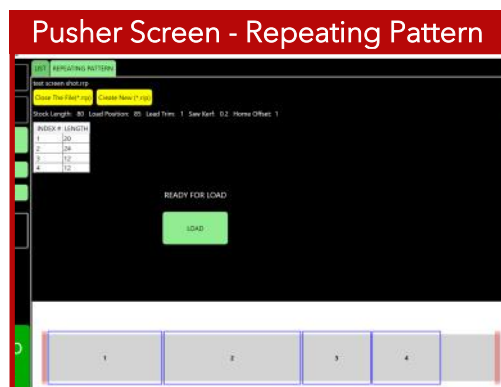

AUTOLIST UPGRADE *Optimize the Yield on Your Material!*

The popular & powerful **AUTOLIST Screen** calculates optimal cutting solutions to maximize yield on your valuable material. AutoList can be mapped to your cutlist layout. Quantities can be multiplied to accommodate today's schedule. Switch between pusher & stop any time.

Include the Tool Safe Sensor to automate the operation!



- ◆ Optimize at the machine or run pre-optimized lists according to a cutting plan.
- ◆ Sort your cut list into hundreds of groups by multiple criteria.
- ◆ Contains unlimited cut list mappings.
- ◆ Accommodates Secondary Operations.
- ◆ Print custom labels.

RAZORGAGE RG3

Specifications

Technical Details

Accuracy: $\pm .005''$ over 12 feet if calibrated with a capable measuring device.

Repeatability: .001"

Push Force: 200 lb at 40 ips

Max Speed: 50 ips

Power Req'd: 120 VAC / 10 Amps

Interface: Hi-resolution Touchscreen with Tower PC


Networking: Wifi or Ethernet Operating System:

Operating System: Windows Pro

Length: Available in 4-60 Foot Stroke



Space Requirements for Tower Enclosure w/ PC Option and Tables

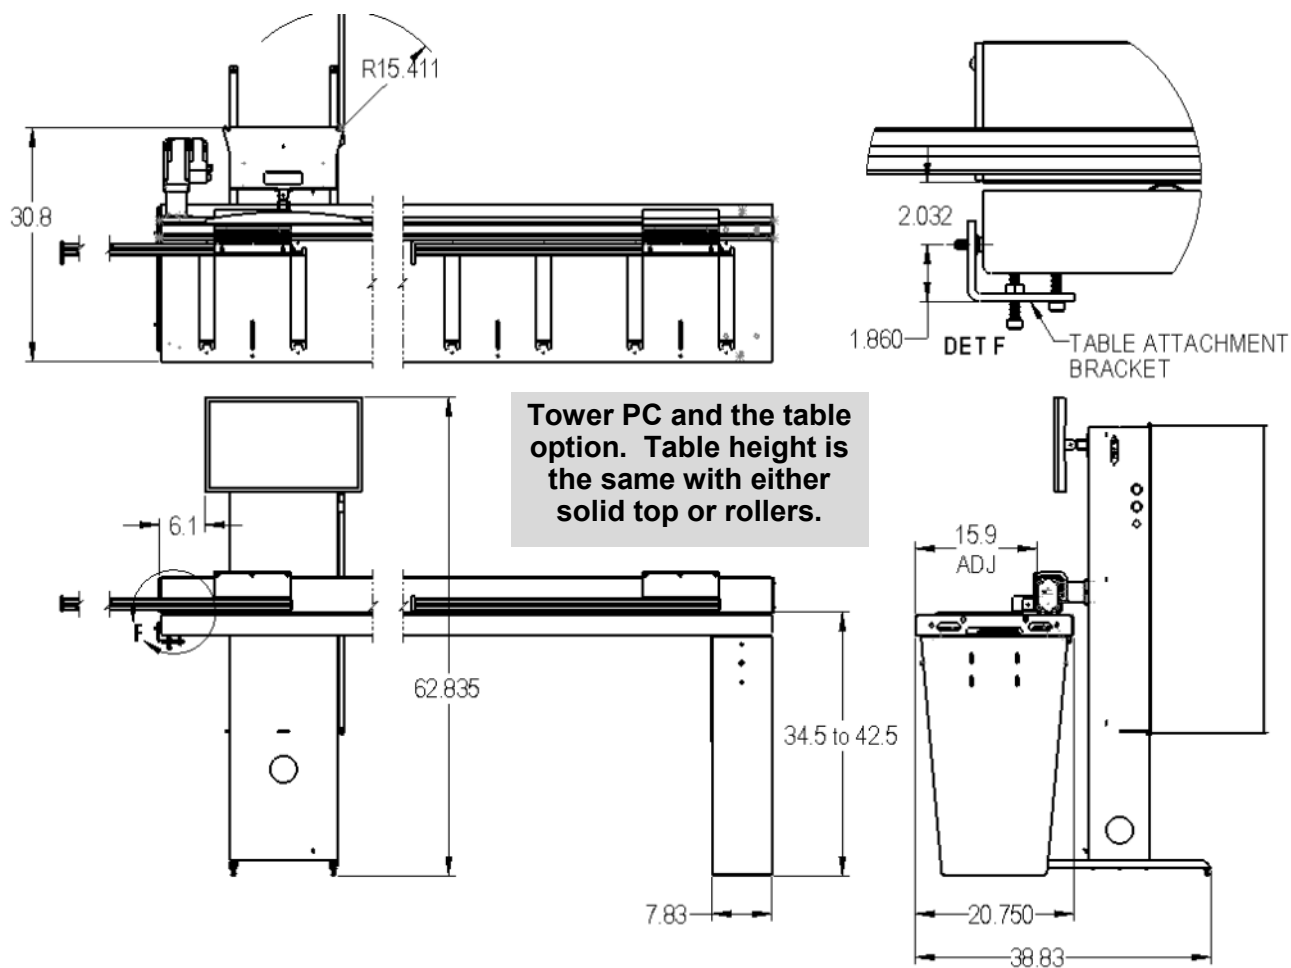

CHOP SAW TABLE

- Height adjusts from 34.5" to 44.5"
- Works with all saw brands
- Durable powder coat finish
- Saw platform adjust to allow perfectly flat transition from table to saw



TABLE ATTACHMENT BRACKET



- Easy to adjust height and front-to-back table position for perfect transition to the work surface and fence
- Secures table to machine to eliminate movement
- Durable finish

TABLE OPTIONS



Table comes with one leg only

- Height adjusts from 34.5" to 44.5"
- 3 surface options;
 - ⇒ 1/4" Solid PVC Sheet
 - ⇒ PVC Rollers
 - ⇒ Steel Rollers
- Durable powder coat finish

BASIC STOP EXTENSION (BSE)



- Allows the material Stop to be adjusted so it extends close to the blade
- Available in 2' to 6' lengths

Picture shows 2' BSE attached to RazorGage

GANG STOP



- Use when pushing boards that are stacked or placed side by side
- Standard size—13" wide x 3.5" high
- Custom sizes available

GRIPPER



- Grips material so it doesn't roll away when being pushed on a roller table
- Only works on hollow extrusions or solid material that has a "fin" like feature

HEAVY DUTY GRIPPER



- Grips heavier material so it doesn't roll away when being pushed on a roller table
- Only works on hollow extrusions or solid material that has a "fin" like feature


ADJUSTABLE BRACKET



- Front-to-Back adjustability for the extension arm

Shown with "birds mouth" stop which is used for double miter saw stop applications

MITER STOP



Safely secures 45° mitered ends against the stop when pushing material